


KISSEL 6-CYL. 45 and 55, 1922-23-24-25-26

Courtesy Delco-Remy Corp., Anderson, Ind.

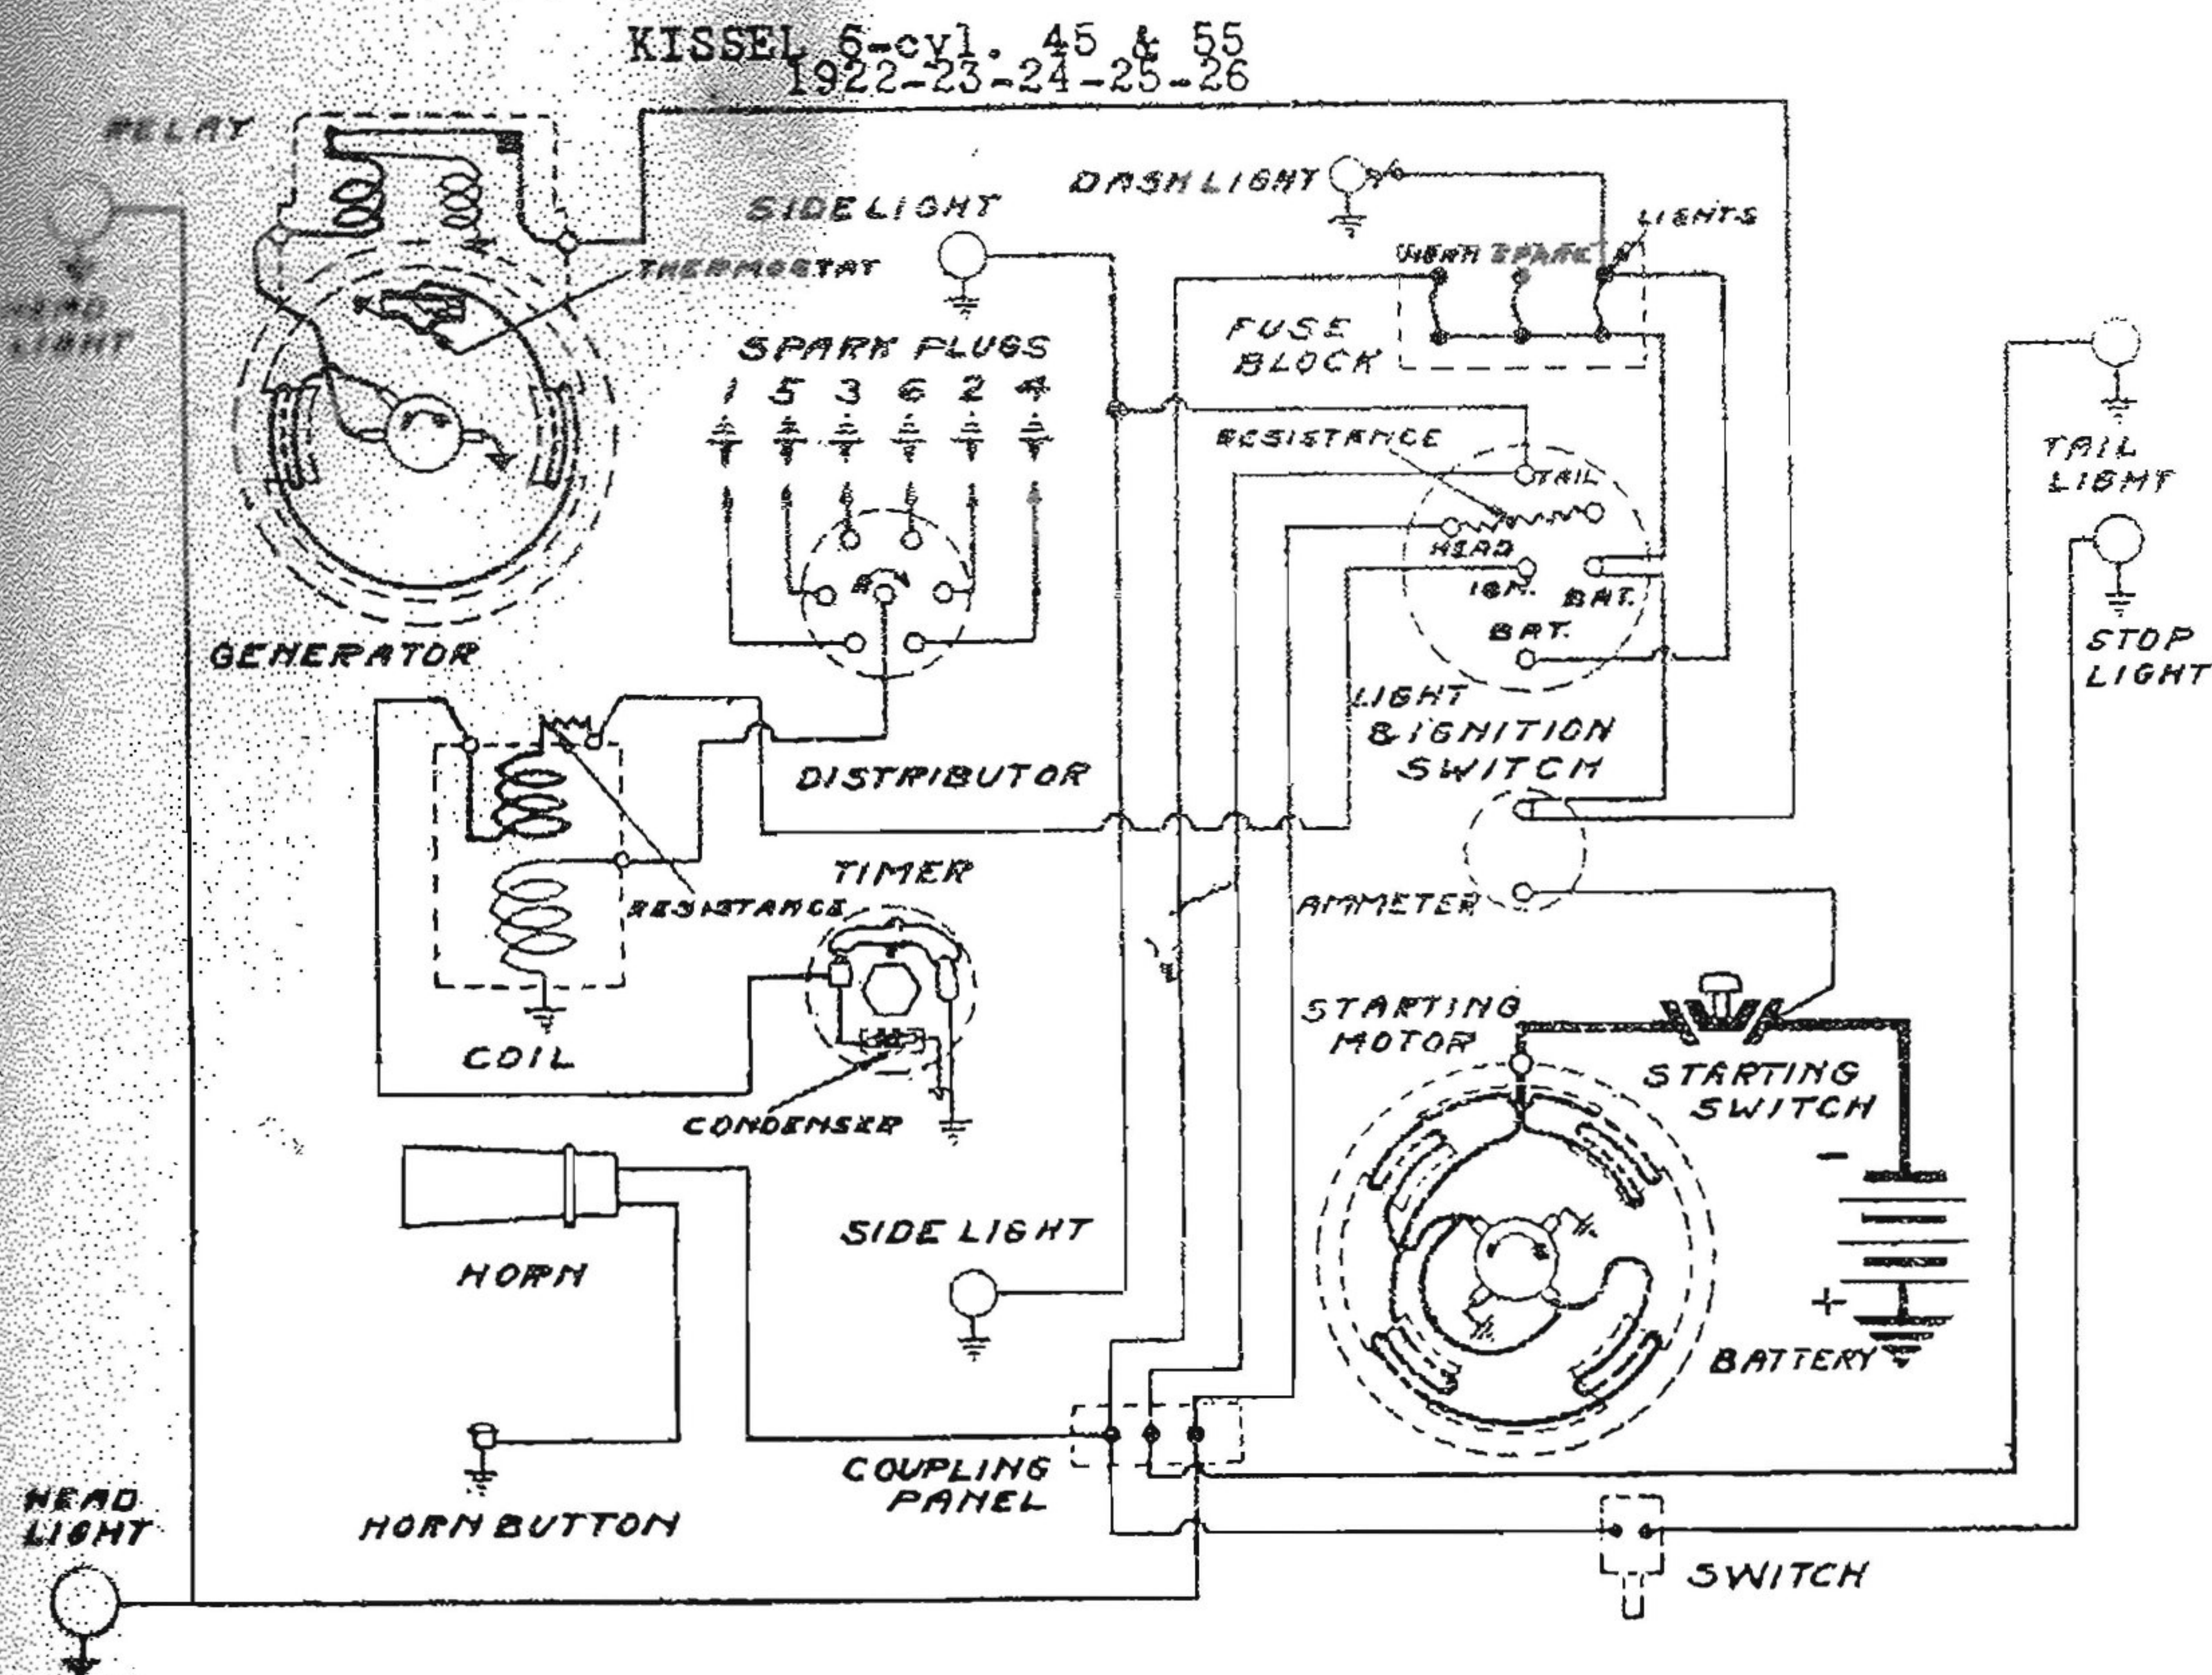

TEST DATA

Kissel 6-Cyl. 45 and 55, 1922-23-24-25-26

STARTING MOTOR No. 720-D, R

Rotation—Clockwise, viewed from drive end.
No Load—65 Amps., 5 Volts, approx. 6000 r.p.m.
Lock Torque—15 lb. ft., 570 Amps., 3.15 Volts.
Brush Tension—20-28 oz.

GENERATOR No. 912-B

Third Brush Regulation—Thermostat Control
Rotation—Clockwise, viewed from drive end.
Field Reading—5 Amps. at 6 Volts.
Max. Cold Output—(Thermostat Closed)—20 Amps., 8.5 Volts, 1800 r.p.m.
Max. Hot Output—(Thermostat Open)—11 Amps., 8.2 Volts, 1900 r.p.m.
Brush Tension—16 oz.

GENERATOR No. 944-A

Third Brush Regulation—Thermostat Control
Rotation—Clockwise, viewed from drive end.
Field Reading—5 Amps. at 6 Volts.
Max. Cold Output—(Thermostat Closed)—21 Amps., 8.5 Volts, 1450 r.p.m.
Max. Hot Output—(Thermostat Open)—11 Amps., 7.5 Volts, 1900 r.p.m.
Brush Tension—22-28 oz.

DISTRIBUTOR No. 626-B, R

Rotation Viewed from Top—Clockwise.
Contact Opening—.020", .028".
Spring Tension at Contacts—17-21 oz.
Manual Advance—20° engine.
Automatic Advance—Start 200 eng. r.p.m.
Maximum—28° eng. at 1400 eng. r.p.m.
Total Advance—48° engine.