


CHANDLER 35, 1927

Courtesy Delco-Remy Corp., Anderson, Ind.-

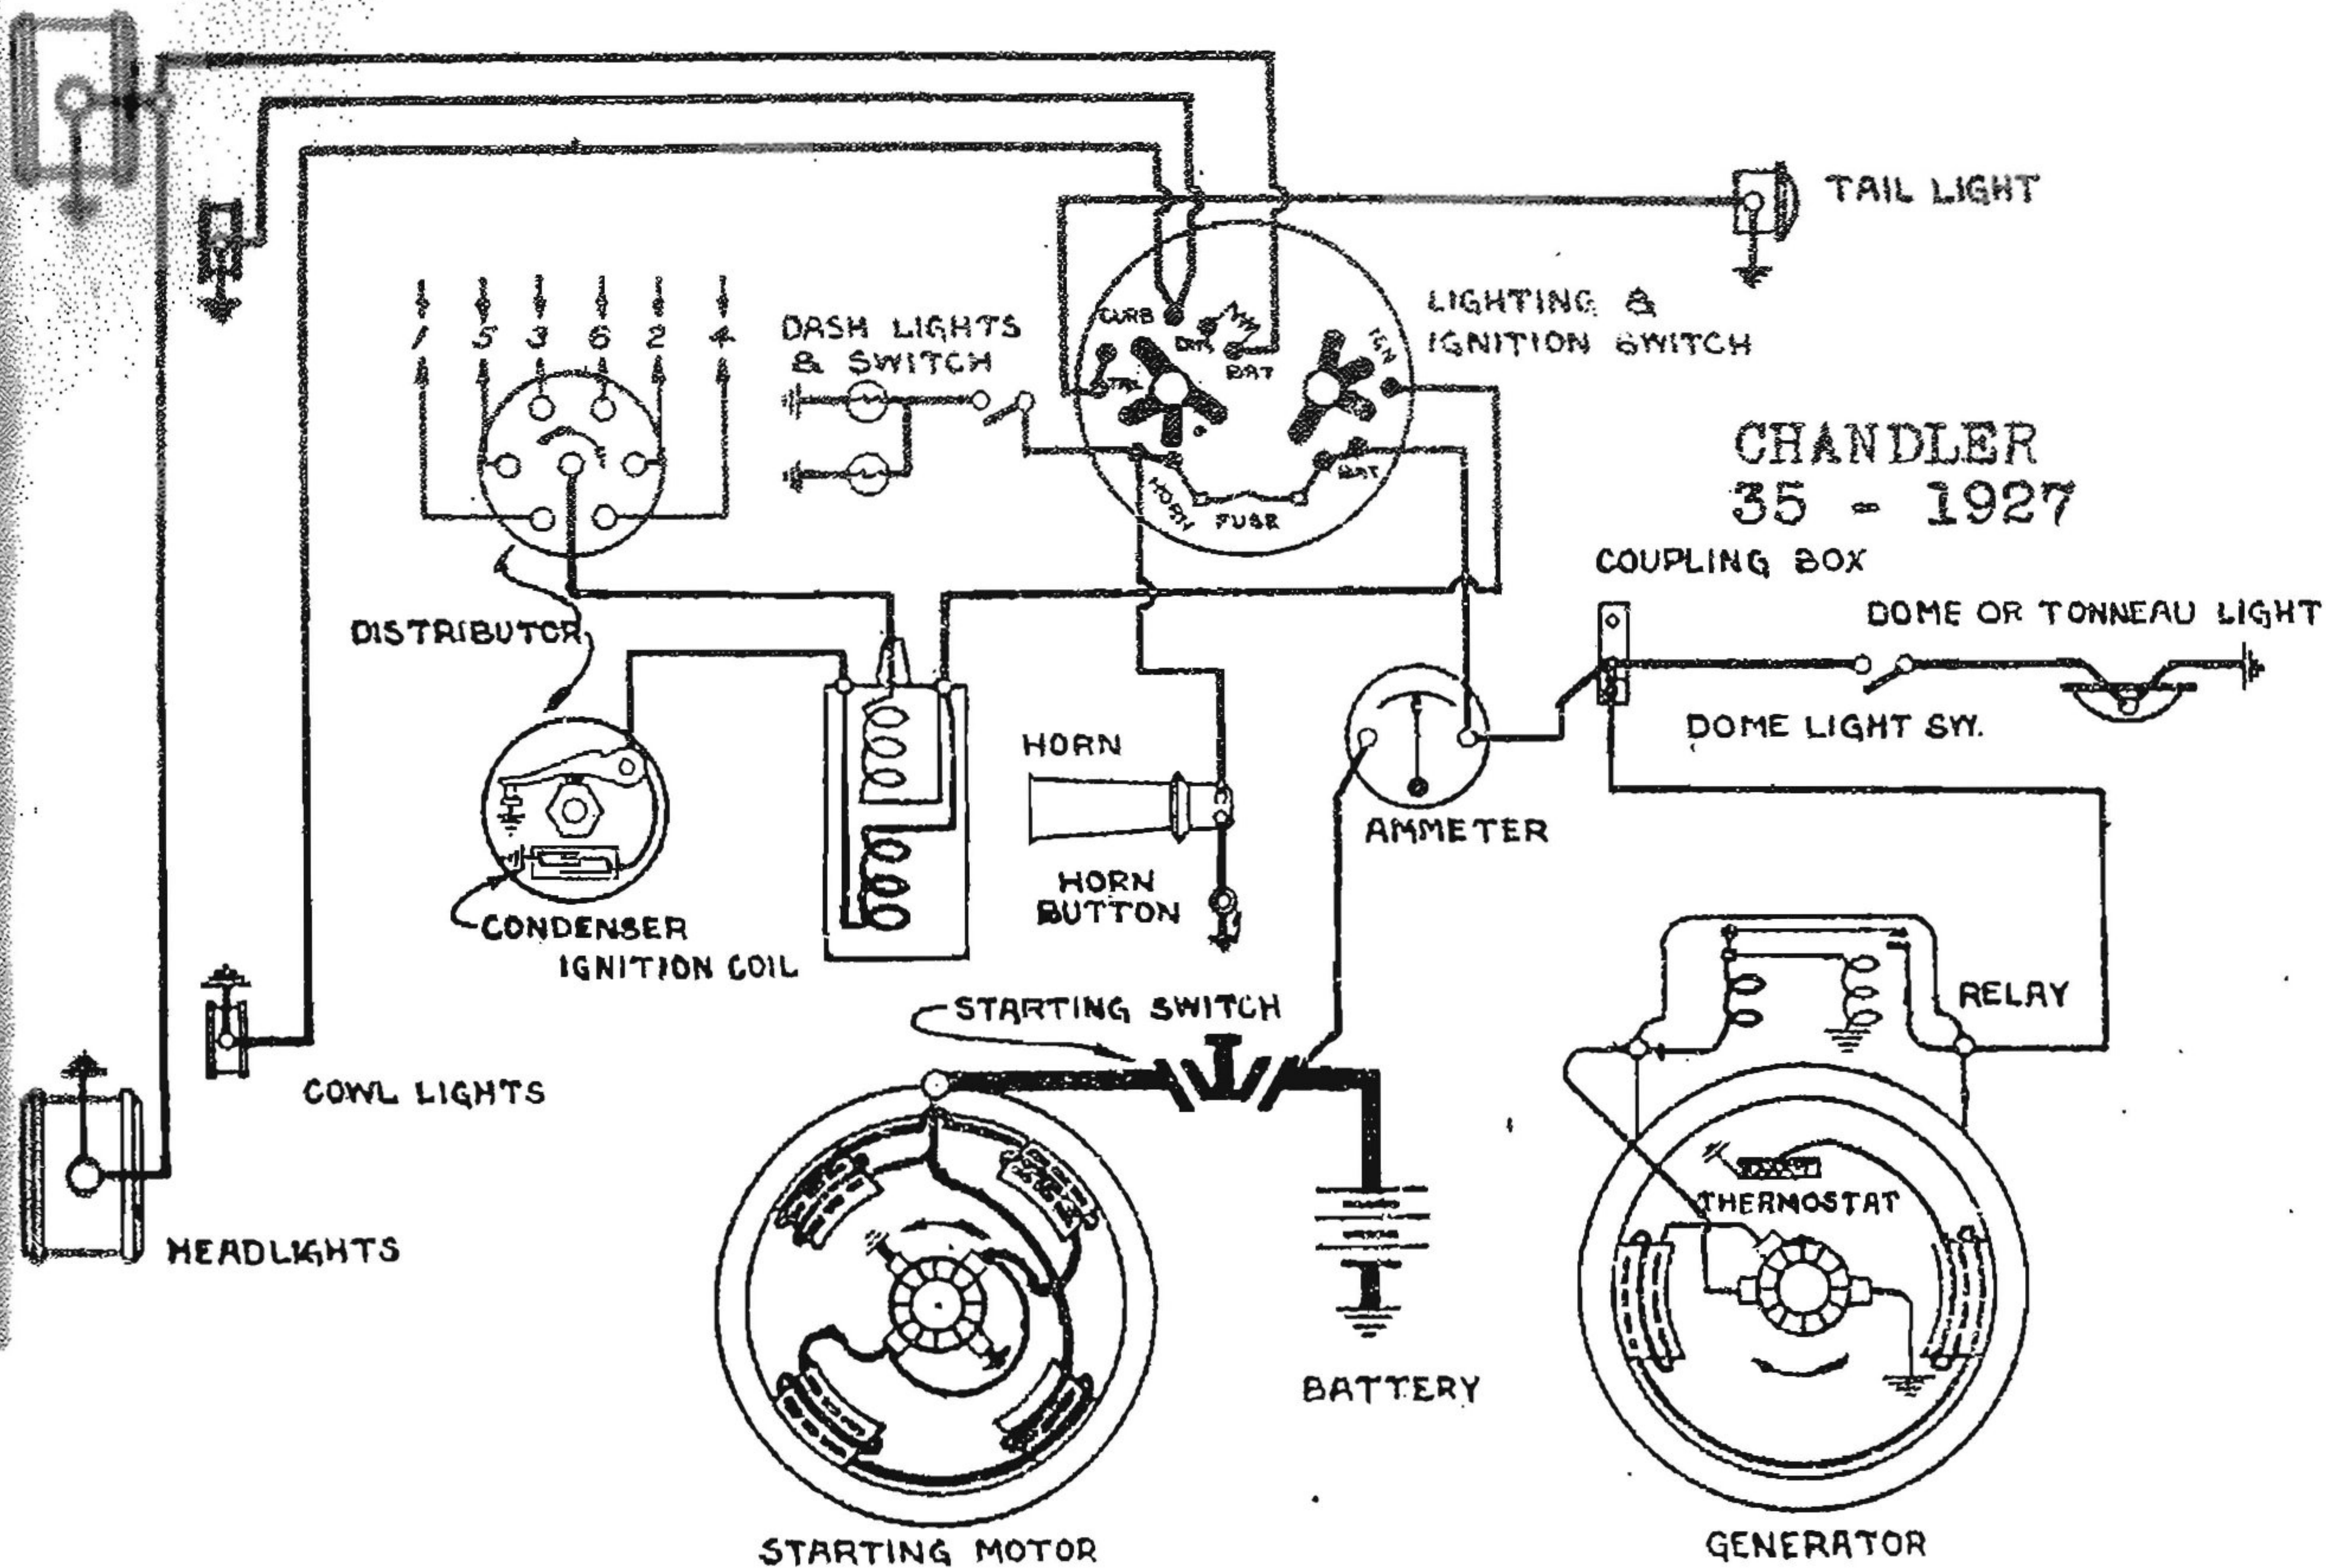

TEST DATA

Chandler 35. 1927

STARTING MOTOR No. 720-W

Rotation—Clockwise, viewed from drive end.
No Load—5 Volts, 65 Amps., 6000 r.p.m.
Lock Torque—15 Ft. lbs., 570 Amps., 3.1 Volts.
Brush Tension—24-28 oz.

GENERATOR No. 944-C

Third Brush Regulation—Thermostat Control
Rotation—Clockwise, viewed from drive end.
Field Reading—5 Amps. at 6 Volts.
Maximum Cold Output—(Thermostat Close)—
20 Amps., 8.5 Volts, 1300 r.p.m

Maximum Hot Output—(Thermostat Open)—
12 Amps., 7.6 Volts, 1400 r.p.m
Brush Tension—24-28 oz.

DISTRIBUTOR No. 637-X

Rotation—Viewed from top, clockwise.
Contact Opening—.018"-.024"
Spring Tension at Contacts—15-20 oz.
Manual Advance—22° Eng.
Automatic Advance—400 Eng. r.p.m. Maxi-
mum, 24° Eng. at 2600 Eng. r.p.m.

