


KISSEL 8-CYL., 1925-26

Courtesy Delco-Remy Corp., Anderson, Ind.

KISSEL 8-Cyl., 1925-26

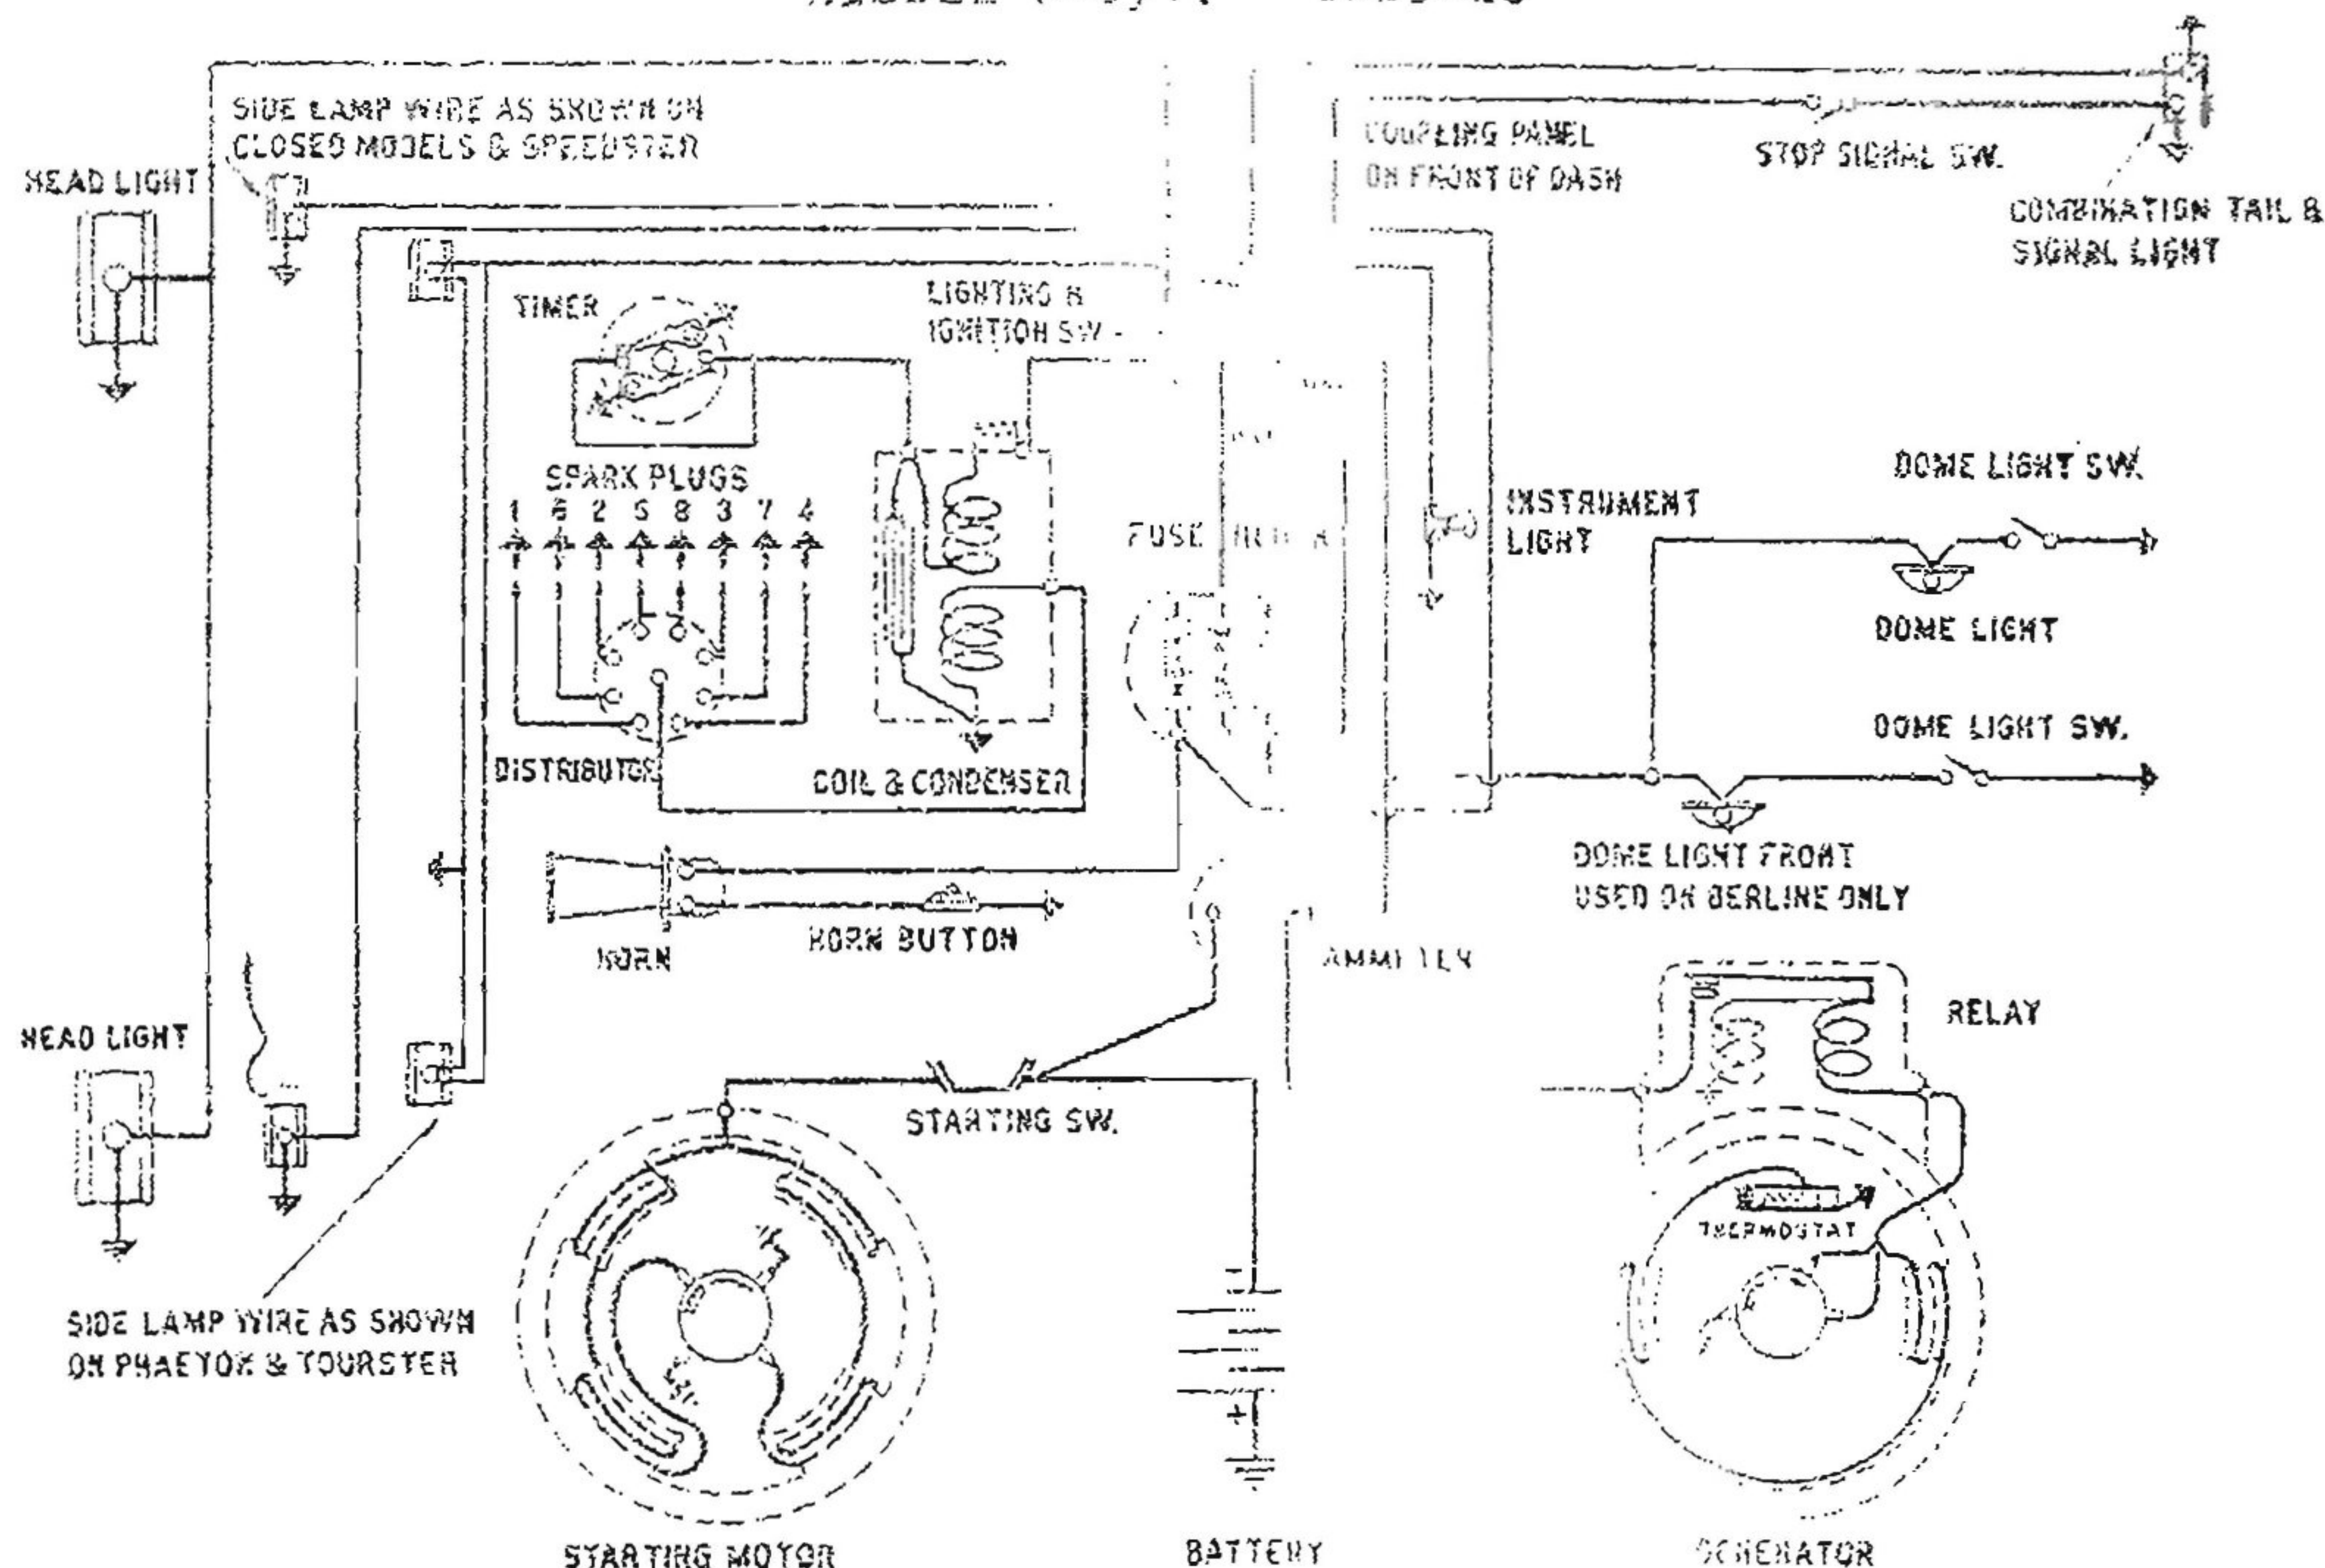

TEST DATA

Kissel 8-Cyl. 1925-26

STARTING MOTOR No. 729-J, Q

Rotation—Clockwise, viewed from drive end.
No Load—65 Amps., 5 Volts, approx. 6000 r.p.m.
Lock Torque—15 lb. ft., 570 Amps., 3.15 Volts.
Brush Tension—24-28 oz.

GENERATOR No. 917-V

Third Brush Regulation—Thermostat Control
Rotation—Clockwise, viewed from drive end.
Field Reading—5 Amps. at 6 Volts.
Max. Cold Output—(Thermostat Closed) 19 Amps., 8.4 Volts, 1900 r.p.m.

Max. Hot Output (Thermostat Open)—11 Amps., 7.5 Volts, 1900 r.p.m.
Brush Tension—22-24 oz.

DISTRIBUTOR No. 648-A

Rotation Viewed from Top—Clockwise.
Contact Opening—.020"-.025"
Spring Tension at Contacts—17-21 oz.
Manual Advance—20° engine.
Automatic Advance—Start 200 eng. r.p.m.
Maximum—31° eng. at 2000 eng. r.p.m.
Total Advance—41° engine.

